

SAW MACHINES



USAGE

Grooves in concrete or brick walls for the passages of pipes and other electric wires

DELIVERY CONTENT

Transport case including:
1 wall grooving machine
1 kit of 6 spacers th. 2/3/4/5/10/17 mm for mounting 2 blades
1 assembly/disassembly key

JOBS

Electrician

TOOLS

For concrete cuts, use a TRB. It fits all powerful grooving machines and allows a clean and fast cut



Grooving machine EMF180.2

Compact and powerful

RÉFÉRENCE	EMF180.2
CARACTÉRISTIQUES TECHNIQUES	
Engine	Electric 230 V - 2300
Diameter	180 mm
Bore	22,23 mm
Depth	60
Working width	60
Rotation speed	2200 rpm
Net weight	8,7 kg
Dimensions l x w x h	410 x 210 x 220 mm




MADE IN EUROPE



Ø 180 mm

↓ 60

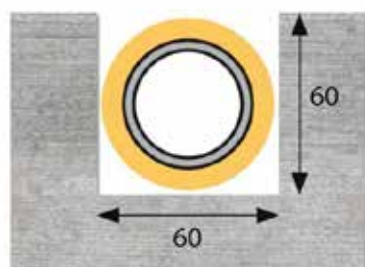



- Lightweight, compact and well-balanced machine with ergonomic design
- Progressive electronic start
- Protective cover against dust and debris + stainless steel dust extraction hood
- Locking system for quick and easy tool change



EXPERT ADVICE

Thanks to the spacer kits (optional) mount 3 or 4 blades at the same time : no need to use a rotary hammer or a chisel



Tool-free cutting depth adjustment. Fast and comfortable



Blocking of the suction hose, prevents accidental release during grooving



Stainless Steel suction hood



Groove width adjustable in 1 mm increments without additional tools



Use of the optional spacer kit, mount 3 or 4 blades at the same time



Direct connection to the vacuum cleaner for better dust extraction

EN OPTION

REFERENCE	DESCRIPTION
CB-3744E	Spacer kit for mounting 3 blades on grooving machine
CB-37445	Spacer kit for mounting 4 blades on grooving machine
ASP-E16	Wet and dry vacuum cleaner 1600 W
ASP-E35L	Wet and dry vacuum cleaner 1200 W ; class L
ASP-E35M	Wet and dry vacuum cleaner 1200 W ; class M
SP0502	Single-phase extension ; 10 m ; L + N + E 16A ; 1.5 mm ²



CB-3744E



CB-37445



ASP-E16



ASP-E35L



ASP-E35M



SP0502